

# Wall split system V Design

A+++ Cooling SEER 8.5  
A++ Heating SCOP 4.6



## ENERGY SAVING



R32 gas



Night mode



Energy saving mode



1 W Standby



ECO mode

## HEALTH



Dust filter



Self-cleaning



Biofilter



Anti-corrosion protection - gold coating



Ionizer

## RELIABILITY



Cooling at a temp. of -15 °C



Heating at a temp. of -25 °C



3D DC Inverter



Error detection and display



Coolant leak detection sensor



Emergency function



The protective cover of the valve



Chasis Heating Belt



Compressor Heating Belt



Intelligent defrosting



Operation at low voltage

## COMFORT AND CONVENIENCE



Last mode memory



Timer



Louver Position Memory



Whisper air



3 air flow speeds



Heating at 8 °C



Automatic operating mode



Turbo



Digital display



3D air flow



Manual control



I Feel function



Silent operation



Two-way condensate drain hose



Auto swing



12 air flow speeds



Soft start



Wi-Fi ready




Mono and multi compatibility

	Model	ACP-12CH35AEVIs R32
Cooling	Capacity (W)	3517 (1377~4308)
	Energy efficiency class	A+++
	Energy Efficiency SEER	8.5
	Cooling operating range	-15 °C ≤ T ≤ 50 °C
	Estimated load on cooling (W)	3500
Heating	Power input (W)	1034 (130~1650)
	Capacity (W)	3810 (1067~4381)
	Energy efficiency class	A++
	Energy Efficiency SCOP	4.6
	Heating operating range	-25 °C ≤ T ≤ 30 °C
Indoor unit	Estimated load on heating (W)	2500
	Power input (W)	1030 (160~1560)
	Air flow (m³/h) - HI / MID / LOW	558 / 478 / 384
	Dehumidifying capacity (L/h)	1.2
	Noise - Sound Pressure (dB(A)) - HI / MID / LOW	37.5 / 32 / 24
Outdoor unit	Volume under standard conditions (dB)	≤ 51
	Packaging dimensions (mm)	985 x 265 x 385
	Device dimensions (mm)	897 x 182 x 312
	Gross / net weight (kg)	14.2 / 10.5
	Noise - Sound Pressure (dB(A))	≤ 54
Connections	Volume under standard conditions (dB)	≤ 60
	Coolant	R32
	Bracket distance (mm)	452
	Packaging dimensions (mm)	887 x 337 x 610
	Device dimensions (mm)	765 x 303 x 555
Power Supply	Gross / net weight (kg)	29.1 / 26.7
	Liquid phase pipe diameter	1/4"
	Gas phase pipe diameter	3/8"
	Maximum pipe length (m)	25
	Maximum height difference (m)	10
3D AIR FLOW	Pre-filled pipe length (m)	5
	Gas refill (g/m)	12
	Power interconnect cable (mm²)	5 x 1.5
	Power Supply IU/OU 220~240V/1/50Hz (mm²)	3 x 1.5
		● ●



## COLOR PANEL

In addition to the attractive mirror design of the V design air conditioner in 2 colours, different LED lighting shows in which mode the device is located. It illuminates blue in cooling mode and red in heating mode.

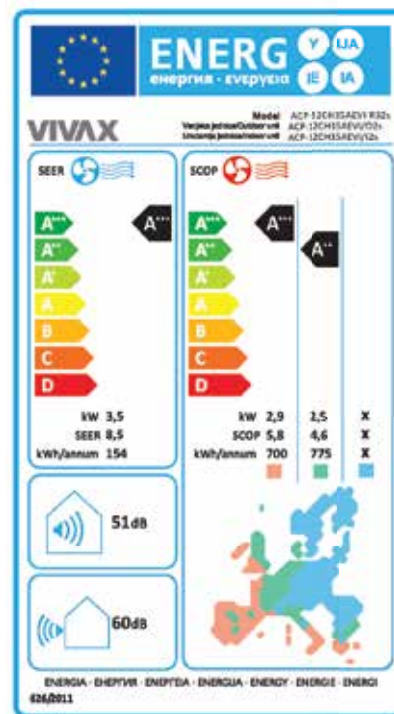

# A+++ | A++

A +++ energy class in cooling and A ++ energy class in heating ensure superior energy efficiency with significant energy savings.

## 3D AIR FLOW

The directional air outlet automatically moves horizontally and vertically directing the air flow to fill every corner of the room.

